

{CFL} High Power Factor Spiral

High Power Factor Spiral

10,000hrs



Watts	Lumen(lm) ≥	PF	Base	M.O.L H1(mm)	CRI≥	Certificate	Color
15W	950	>0.9	E26	55	>80	UL, FCC, ROHS	2700K
20W	1260	>0.9	E26	60	>80	UL, FCC, ROHS	2700K
23W	1600	>0.9	E26	60	>80	UL, FCC, ROHS	2700K

Energy Saving Lightbulb



{T} 626.289.2885  
 {E} ken.lively@gmail.com

{Distribution Centers}

Los Angeles | San Francisco | New Jersey



**WONDROUS LIGHTING**  
**CONSERVE ENERGY**




1709 South 2nd Street, Suite 4, Alhambra, California 91801

www.bulbstar.com

| (626) 289-2885

### A-Lamp

120V / 60Hz / 10,000hrs



Watts	Lumen(lm) ≥	Base	M.O.L H1(mm)	Base Height H2(mm)	Bulb Dia. H3(mm)	Base Width H4(mm)	CRI ≥	Certificate	Color
9W	500	E26	104	46	56	43	80	UL, FCC, ROHS	2700K 4100K
14W	800	E26	123	53	61	48	80	UL, FCC, ROHS	2700K 4100K
19W	900	E26	148	60	69	50	80	UL, FCC, ROHS	2700K 4100K

### Dimmable CFL


10,000hrs



Watts	Lumen(lm) ≥	Base	M.O.L H1(mm)	CRI ≥	Certificate	Color
13W	900	E26	55	>80	UL, FCC, ROHS	2700K
18W	1250	E26	60	>80	UL, FCC, ROHS	2700K
23W	1600	E26	60	>80	UL, FCC, ROHS	2700K

### Globe


120V / 60Hz / 10,000hrs



Watts	Base	M.O.L H1(mm)	Base Height H2(mm)	Bulb Dia. H3(mm)	Base Width H4(mm)	CRI ≥	Lumen(lm) ≥	Certificate	Color
9W	E26	109	46	79	43	80	450	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs
14W	E26	109	53	79	48	80	800	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs
19W	E26	127	55	96	77	80	950	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs

### T2 Spiral


120V / 60Hz / 10,000hrs

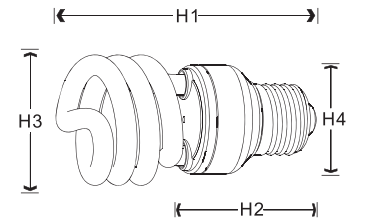

Watts	Lumen(lm) ≥	Base	M.O.L H1(mm)	Base Height H2(mm)	Bulb Dia. H3(mm)	Base Width H4(mm)	CRI ≥	Certificate	Color
9W	550	E26	90	50	48	40	80	UL, FCC, ROHS	2700K 4100K 5000K
13W	900	E26	105	52	48	40	80	UL, FCC, ROHS	2700K 4100K 5000K
20W	1200	E26	110	60	60	49	80	UL, FCC, ROHS	2700K 4100K 5000K
23W	1600	E26	120	60	60	49	80	UL, FCC, ROHS	2700K 4100K 5000K

### Reflector


120V / 60Hz / 10,000hrs



Watts	Base	M.O.L H1(mm)	Base Height H2(mm)	Bulb Dia. H3(mm)	Base Width H4(mm)	CRI ≥	Lumen(lm) ≥	Certificate	Color
11W	E26	122	61	62	49	80	350	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs
14W	E26	135	61	94	49	80	700	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs
16W	E26	147	61	94	49	80	750	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs
23W	E26	160	61	120	55	80	1200	UL,CUL,FCC	2700K 10,000hrs 4100K 10,000hrs

### T3 Spiral

120V / 60Hz / 10,000hrs

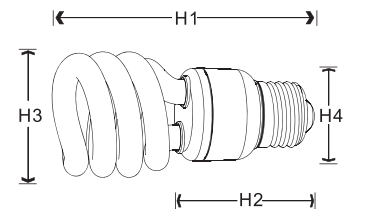

Watts	Lumen(lm) ≥	Base	M.O.L H1(mm)	Base Height H2(mm)	Bulb Dia. H3(mm)	Base Width H4(mm)	CRI ≥	Certificate	Color
9W	550	E26	105	57	50	37	80	UL, FCC, ROHS	2700K 4100K 5000K
13W	900	E26	110	57	50	37	80	UL, FCC, ROHS	2700K 4100K 5000K
15W	950	E26	120	57	45	37	80	UL, FCC, ROHS	2700K 4100K 5000K
20W	1200	E26	120	62	60	46	80	UL, FCC, ROHS	2700K 4100K 5000K
23W	1600	E26	132	62	60	46	80	UL, FCC, ROHS	2700K 4100K 5000K
26W	1650	E26	138	62	60	46	80	UL, FCC, ROHS	2700K 4100K 5000K